




Firma: BIZ GROUP DOO BEOGRAD
Adresa: Kapetana Radiča Petrovića 32b
Telefon: 011 452 52 66, 060 452 52 66
Fax:
PIB: 111338015
E-mail: office@bizgroup.rs

Switch TP Link TL-SG108PE 8-port Gigabit POE

Šifra: 21113
Kategorija proizvoda: Switch uređaji
Proizvođač: TP-Link

Cena: **8.717,00** din.

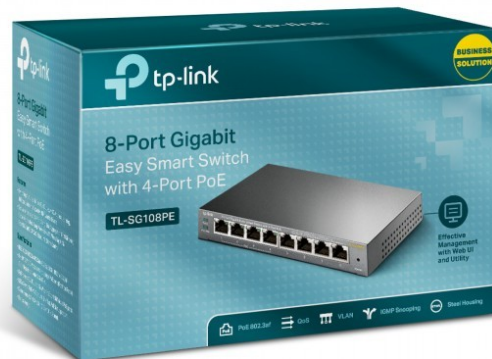

HARDWARE FEATURES	
Standards and Protocols	IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3x, IEEE 802.1q, IEEE 802.1p
Interface	8 10/100/1000Mbps RJ45 Ports AUTO Negotiation/AUTO MDI/MDIX
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-TX: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 1000BASE-T: UTP category 5, 5e, 6 or above cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
Fan Quantity	Fanless
Power Supply	External Power Adapter 100VAC ~ 240VAC (Output: 48VDC / 1.25A)
PoE+ Ports(RJ45)	
PoE Ports (RJ45)	Standard: 802.3 af compliant PoE Ports: Port 1- Port 4 PoE Power Budget: 55W
Dimensions (W x D x H)	6.2 x 4.0 x 1.0 in (158 x 101 x 25 mm)
Max Power Consumption	5.2W with no PoE device connected 65.2W with 55W PoE devices connected
Max Heat Dissipation	17.6 BTU/h (with no PD connected) 222.4 BTU/h (with 55W PD connected)
PERFORMANCE	
Switching Capacity	16Gbps
Packet Forwarding Rate	11.9Mpps
MAC Address Table	4K
Packet Buffer Memory	1.5Mb
Jumbo Frame	15KB
SOFTWARE FEATURES	
Quality of Service	Support Port-Based/802.1p/DSCP priority Support 4 priority queues Rate Limit Storm Control

SOFTWARE FEATURES

L2 Features	IGMP Snooping V1/V2/V3 Link Aggregation Port Mirroring Cable Diagnostics Loop Prevention
VLAN	Supports up to 32 VLANs simultaneously (out of 4K VLAN IDs) MTU/Port/Tag VLAN
Management	Web-based GUI Easy Smart Configuration Utility
Transmission Method	Store-And-Forward
OTHERS	
Certification	FCC, RoHS
Package Contents	TL-SG108PE Power Adapter Installation Guide Rubber Feet
Environment	Operating Temperature: 0?~40? (32?~104?) Storage Temperature: -40?~70? (-40?~158?) Operating Humidity: 10%~90%RH non-condensing Storage Humidity: 5%~95%RH non-condensing